

NATURAL CURRENT SPECIFICATIONS



Body

- Size: 24" W x 35" L x 12" H
- Weight: 28 lbs.
- Body Type: Cross-link plastic

Pump

- Flow Rate: 8 Gallons-Per-Minute (GPM)
- Flow Rate: 500 Gallons-Per-Hour (GPH)
- Maximum Head: 10 ft
- Hose Outlet: 3/4"
- Maximum water Temperature: 104°F
- Typical Life: 1500 to 2500 hours
- New Replacement Cost: \$29.00
- Power: 12V, 1.9A
- Shaft Material: Stainless Steel
- Certifications: UL, CE and ISO 8849

Filter


- Media: 175 pleat count, 3 oz. Reemay 2033; 20 Micron Cartridges
- Effective Filtration Area: 32 sq ft

Solar Panel

- Solar 36W, 12V, 2.0A, Polycrystalline Silicon
- Operating temperature: -40°C to + 85°C / -40°F to +185°F
- Weight: 8.31 lbs. / 6 kg
- Front glass: 3.2 mm tempered
- Max Load: 5.4 kPa
- Certifications: UL, TUV, IEC, and ETL

Shipping

- Box Size: 25" W x 35" L x 12" H
- Weight: 30 lbs.

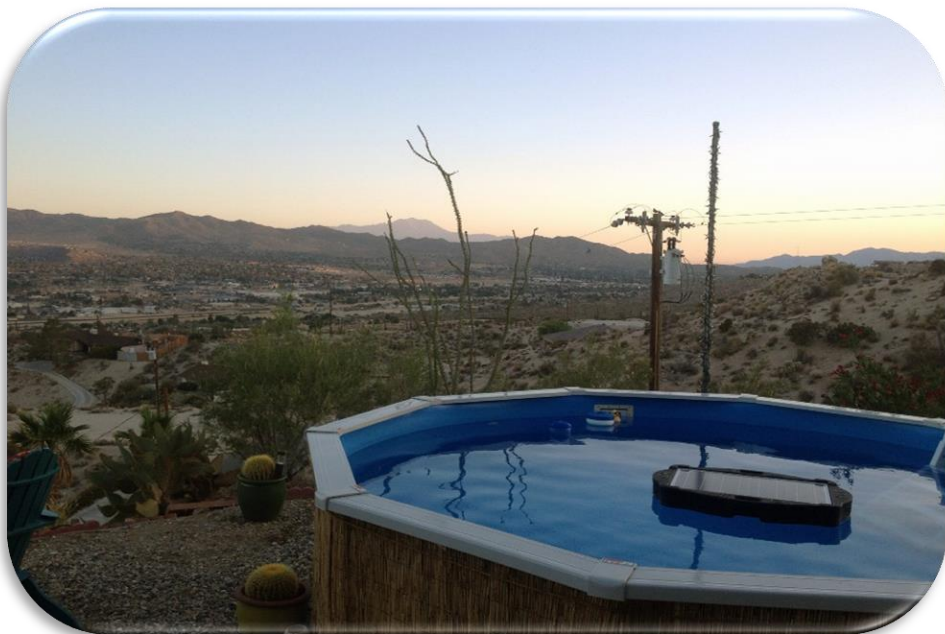

**NATURAL CURRENT | PO Box 3803, Dana Point, CA 92629 | Phone: 1-855-372-8467
E-Mail: info@naturalcurrent.com | Web Site: <http://www.naturalcurrent.com>**