

Anything But Basic

Cabinet

- Outdoor top - (standard)
- Wind-resistant design
- Channels rainwater out
- Textured powder-coat finish
- Optional indoor top

Digital Controls

- Microprocessor-controlled
- Built-in diagnostics
- Backlit LCD display
- Pool and spa settings
- Lexan cover
- Remote-compatible

Burner Tray

- Easily removable
- Stainless steel burners
- Brass orifices
- Aluminized metals
- Stainless steel heat shield
- Spark-to-pilot ignition
- 120/240V Combustion fan motor



Heat Exchanger

- Integral copper fin tube - (standard)
- Automatic bypass
- Unitherm governor
- Polymer headers
- Stainless steel tube sheet
- Reversible for left-side water connections.
- ASME - (optional)
- Cupro-nickel - (optional)

2" CPVC Connections

High Limits and Controls

- Mounted on the in/out header

Ceramic Fiber Combustion Chamber

Non-Combustible Base

- Heater can be installed on a combustible surface

120/240V

- Incoming power can be connected to the right or left side.

Model	BTUH Input
207	199,500
267	266,000
337	332,500
407	399,000

Optional D-2 Power Vent

D-2 Power Vent

Sometimes, equipment rooms or unusual venting configurations require the use of a power vent. Being the heater experts, we have this option for you when the need may arise.

Through-the-Wall Capable

The D-2 Power Vent assembly is a Category III mechanical draft venting system that operates under a positive static pressure and prevents excessive condensate production in the vent. All sizes are capable of relieving flue gases up to a maximum of 100 equivalent feet of vent length. All models have a standard 4"-diameter exhaust connection.

Multi-Position

Using the Raypak-supplied adjustable 90° elbow, the flue gases may be discharged in any direction (see D-2 Power Vent manual for details). The D-2 Power Vent is also dual-voltage capable (120/240 volt) and engineered for long life and smooth operation.



D-2 Power Vent

For dimensions and technical specifications, see catalog number 6000.36.

In keeping with its policy of continuous progress and product improvement, Raypak reserves the right to make changes without notice.



Raypak, Inc. 2151 Eastman Avenue, Oxnard, CA 93030. (805) 278-5300. Fax (800) 872-9725
 Raypak Canada Limited 2805 Slough Street, Mississauga, Ontario, Canada L4T 1G2. (905) 677-7999. Fax (905) 677-8036
www.raypak.com

Litho in U.S.A. ©2004 Raypak, Inc. Catalog No. 6000.23 Effective: NEW



The Pool and Spa Heating ExpertsSM



Raypak Digital Low NOx

Pool and Spa Heater

The Raypak Digital Low NOx

Choices

3 Levels of Performance

Digital Control

Microprocessor-Controlled Thermostat

The Raypak Digital gas heater is equipped with a micro-processor-based control center. This control allows you to set your pool or spa temperature precisely at your preferred setting just by pressing an up or down temperature control button. The digital display gives you a constant readout of your water temperature. Just set it, and forget it! Truly simple. If only your VCR were this easy to operate.

Self-Diagnostic

Troubleshooting a Raypak gas heater has never been easier. The Raypak Digital has on-board diagnostic controls that let the user and the service professional know what is going on with the heater at all times. In the unlikely event that a problem develops, the digital display easily points out the problem and the probable cause. It's like having a service technician built into every heater!

Remote-Compatible

The Raypak Digital is compatible with most major pool control and remote systems on the market today. Any two- or three-wire remote can connect to the Raypak Digital and be integrated into the pool control system of your choice.




Heat Exchanger

Condensation-Free Operation

Both water temperature and flow rate inside the heater are controlled to help eliminate condensation, sooting and scale buildup that can shorten the life of a heater. Raypak engineered the Unitherm Governor specifically for pool heater applications, regulating low-temperature incoming water to help reduce condensation. For over 30 years, Raypak has led the industry, setting the standard for condensation protection.

Rust-Free Waterways

The Raypak Digital, with polymer headers, is equipped with an integral copper finned-tube heat exchanger and stainless steel tube sheets. This unique construction guarantees rust-free operation, especially important when heating spas and smaller pools. Even the smallest details such as the studs and nuts are made out of stainless steel. The payoff? A heater that will last year after year and can easily be serviced if the need should ever arise.

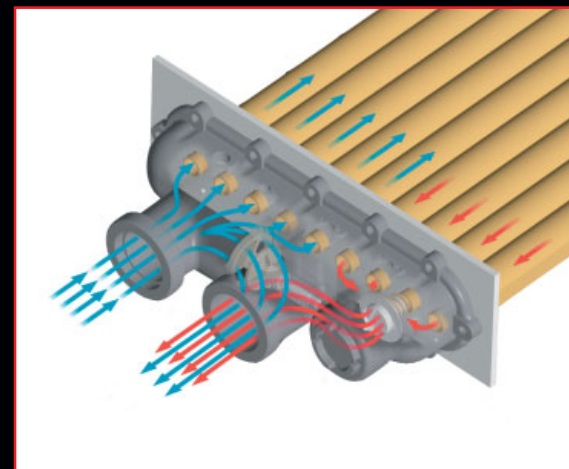

Burners

Stainless Steel Burners

Burner design is a critical component in any gas heater. The stainless steel burner system used in the Raypak Digital is inherently forgiving and extremely robust. The burner is self-adjusting to compensate for gas pressure fluctuations, allowing the heater to always burn clean and safe.

Fan-Assisted Combustion

Not all low NOx heaters are made the same. The Raypak Low NOx design uses a fan to provide cool, controlled combustion air to the burners. Other brands use a fan to pull hot flue gases through the heater. The Raypak design allows the heater to outperform all others during cold starts and provides longer component life.

Pilot Ignition

The Raypak Digital use a spark-to-pilot ignition system. This is the most reliable and robust ignition system available—an industry proven standard for over 20 years.



Copper Fin Tube - (Standard)


The Raypak Digital is built to last with the highest quality integral copper fin tube available. Copper is well known for its ability to efficiently transfer heat, and is an excellent choice for pool and spa heater heat exchangers, where the water chemistry is properly maintained.

ASME Copper Fin Tube - (Optional)

The Raypak Digital ASME gas heater is equipped with .062" wall integral copper finned tubes. This tubing is approximately 50% larger in wall thickness than standard tubing, providing additional resistance to wear from chemical corrosion.

Cupro-Nickel Fin Tube - (Optional)

Raypak heaters are available with an optional cupro-nickel fin tube heat exchanger for added protection against aggressive water chemistry, which has been known to attack copper heat exchangers and cause premature failure. Cupro-nickel offers superior tolerance to bad water chemistry and increased erosion protection, thanks to a harder surface and a wall that is approximately 50% thicker than our standard copper fin tube. When you are unsure of your ability to maintain the pool or spa water chemistry, a cupro-nickel heat exchanger is a cost-effective way to protect against premature failure.

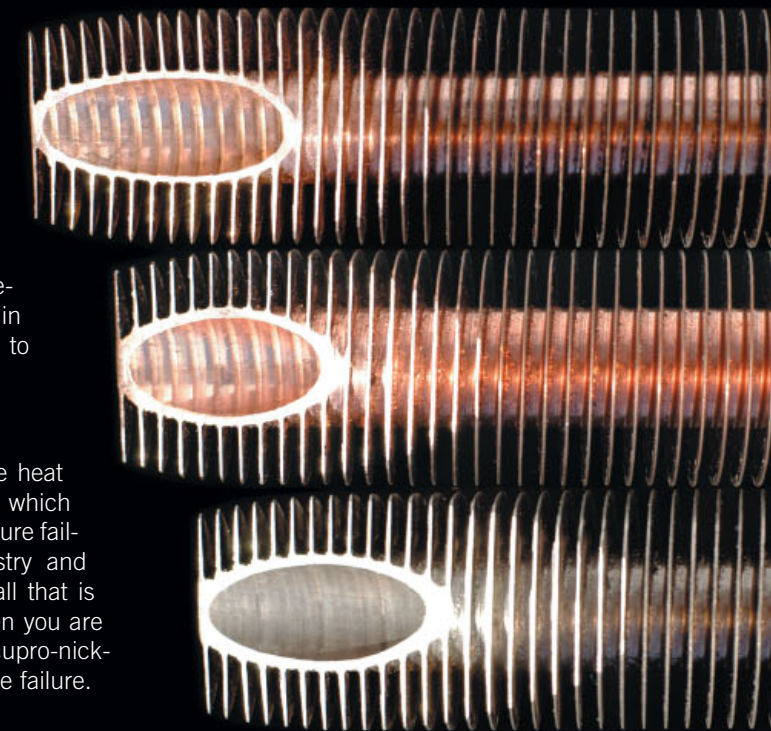


ASME



On-site state inspectors

ASME

The Raypak Digital heater is also available in an optional ASME version. Raypak has state inspectors on-site daily performing certifications for our pool heater and commercial boiler production that may require ASME. Being in the boiler business for over 50 years truly makes Raypak the leader for your commercial needs. Why ASME? Most local codes require that public pools, pools that are in condominiums, apartments, or other commercial applications, be ASME certified. ASME stands for American Society of Mechanical Engineers, a non-profit group which sets many industrial and manufacturing standards. A pool heater that is made to ASME standards must perform to a set of specifications as determined by ASME, specifically in relation to the operating water pressure the appliance can handle. Each and every ASME heat exchanger that goes into a Raypak heater is certified by a state inspector to make sure it complies with all ASME codes for pool heaters.

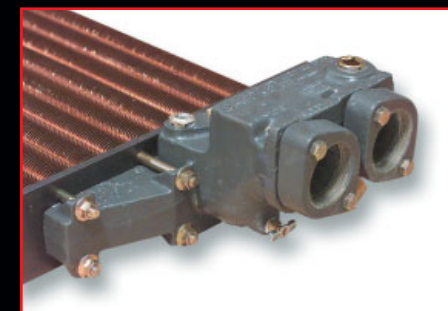

Cast iron headers

Glass-Lined Cast Iron Headers

Raypak has applied its years of commercial boiler experience to the design of the cast iron glass-lined header. A metal header design allows for the higher working pressures required by ASME. Only after the material meets the stress analysis and metal composition tests is it approved for use in an ASME unit.

Expect MoreSM

Raypak
A Rheem[®] Company