


Smart choice for power

xantrex

Grid Tie Solar Inverter Monitor

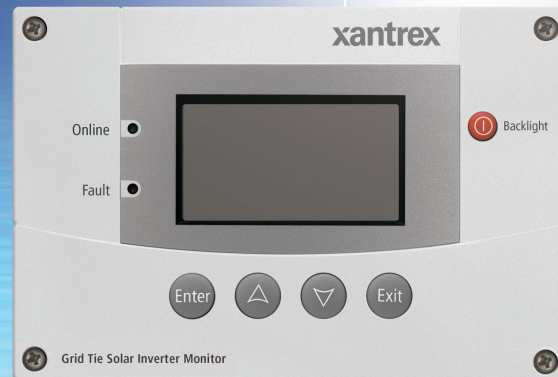

Use the Xantrex Grid Tie Solar Inverter Monitor as a simple means of monitoring your solar system


The GT Solar Inverter Monitor features a graphical, backlit LCD screen to monitor your single or multi-inverter PV system in one convenient location inside the home. Large keypad buttons, an intuitive onscreen menu system and plain text status messages make the monitor easy to read and use.

The monitor easily connects to GT Series inverters using standard off-the-shelf CAT 5 Ethernet cable. Built in flash memory stores PV system data and makes software upgrades simple to take advantage of new features and monitor enhancements.

Product Features

- ▶ Compatible with all Xantrex GT Series Grid Tie Solar Inverters
- ▶ Displays total PV system performance in daily, monthly, and lifetime views on a graphical 128 x 64 pixel LCD screen
- ▶ Access detailed individual inverter performance through the device list screen
- ▶ Large, tactile buttons to navigate through the intuitive menu system
- ▶ Displays individual and total system performance for up to 10 GT inverters


Examples of some of the available screens:

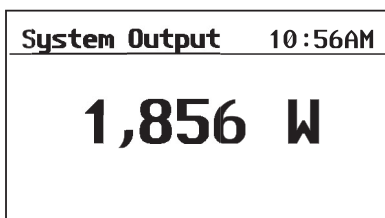

Solar System Output

System Totals	11:17AM
Today:	1,320W h
Lifetime:	2,505kW h
\$\$ Saved	\$400
CO2 Avoided:	3,100kg

System Totals/Summary Screen

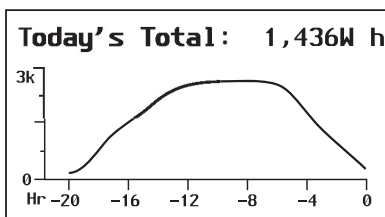

Daily System Energy

Device List	11:17AM
Sr1#1234ABCD	1,713W
Sr1#5678EFGH	1,854W
Sr1#8765HGFE	1,135W
Sr1#4321DCBA	Fault

List of Monitored GT Inverters



Xantrex Technology Inc.

Headquarters
8999 Nelson Way
Burnaby, British Columbia
Canada V5A 4B5
800 670 0707 Toll Free
604 420 1591 Fax

5916 195th Street NE
Arlington, Washington
USA 98223
800 446 6180 Toll Free
360 925 5144 Fax

www.xantrex.com

Optional equipment for Xantrex GT Series inverters (240 Vac and 208 Vac)

Mechanical Specifications	
Display	Dot matrix 128 x 64 LCD with white LED backlight
Dimensions (H x W x D)	6 x 4 x 1 9/16" (152 x 103 x 40 mm)
Weight	0.46 lb (0.207 kg)
Environmental Specifications	
Operating temperature	-4 °C to 122°F (-20 °C to 50 °C)
Storage temperature	-40 °C to 185°F (-40 °C to 85 °C)
Regulatory Compliance	
Safety	CSA certified to CSA 107.1-01 and IFCC Class B
Part number	864-0203

Note: Specifications subject to change without notice.

