



Product Information Sheet

Solar Module


BSP-2012

General Information

High performance multi-crystalline cells
 High energy yields in a wide variety of climates
 Anodized aluminum frame provides for easy mounting

Qualification and Certificates

UL Listing Pending

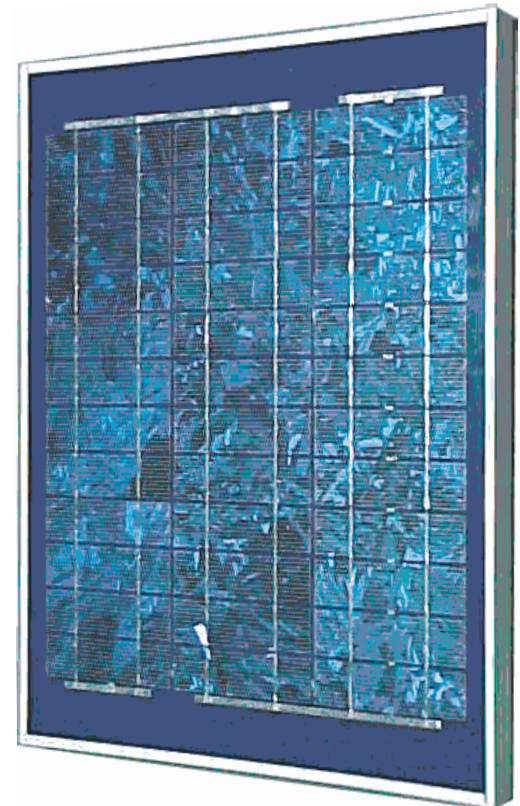

BSP-2012
20 Watt Module

Electrical Characteristics		
Typical Data At STC		
		BSP-2012
Rated Power	Pr	20W
Peak Power	Pmpp	20W
Peak Power Voltage	Vmpp	17.3V
Peak Power Current	I _{mp}	1.20A
Open Circuit Voltage	Voc	21.7V
Short Circuit Current	Isc	1.30A

The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m² irradiance, AM 1.5 spectrum and 25° C cell temperature.

Physical Characteristics		
Length	Inches (mm)	21.81 (554)
Width	Inches (mm)	15.35(390)
Thickness	Inches (mm)	1.33 (33.8)

Cable Type	18/2
Cable Length	feet (cm) 15.0 (457.2)

10 Year Warranty

