


# SOLARTECH POWER

## SPM040P/045P

### SPECIFICATIONS

CELL	Multicrystalline silicon solar cell	156mmx52mm
No. of cells and connections	36(4x9)	
Dimension of module	665x537x35(mm)	26.2x21.1x1.38 (in )
Weight	5kg	11.01b

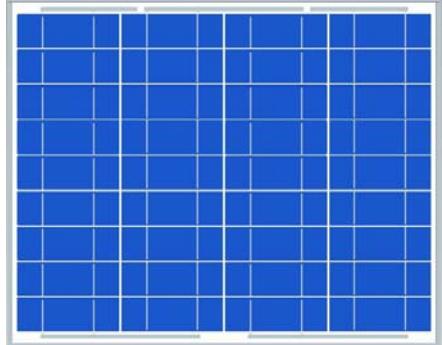

### Characteristics

Model	SPM040P	SPM045P
Power at STC(Pm)	40W	45W
Maximum power voltage(Vpm)	17.3V	18.3V
Maximum power current(Ipm)	2.35A	2.52A
Open circuit voltage(Voc)	21.8V	22.2V
Short circuit current(Isc)	2.57A	2.69A
Tolerance	±5%	±5%
Module efficiency	11.6%	13.10%

STC: Temperature 25°C, Irradiance 1000W/m<sup>2</sup>, AM=1.5

### Limits

Operating temperature	-40 to +85°C
Maximum system voltage	1000V DC
Series fuse rating	12A


### Components & Mechanical Data

Front Glass	3.2mm tempered
Junction Box	IP-65 rated
Frame	Anodized aluminum alloy type 6063-T5
Encapsulation Material	EVA(0.5±0.05mm thickness)
Back Foil	White TPT(0.32±0.03mm thickness)
Temperature Range	-40°C to +90°C
Max Load	5400Pa

### Temperature coefficient

Nominal Operation Cell Temperature	48°C±2°C
Current temperature coefficient	0.06±0.01 %/K
Voltage temperature coefficient	- (78±10) mv/k
Power temperature coefficient	- (0.5±0.05) %/k

### Back of the module

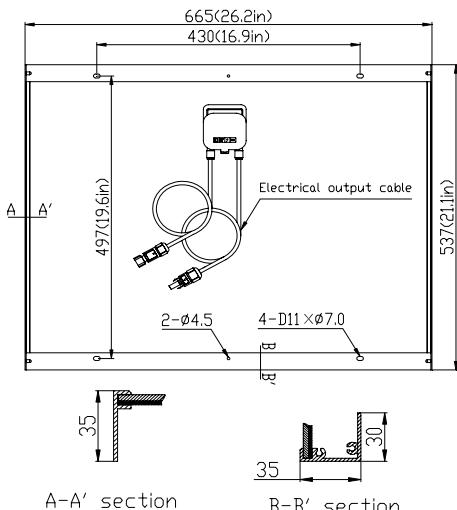

### IV CURVES

