


INTEGRATED THERMISTOR IMMERSION WELL ON UPPER HEADER

## GOBI 410 002 SP [50030]

- Integrated Thermistor Immersion Well
- System Ready Dyn-O-Seal Connections
- Black paint surface absorber coating produces ideal absorption for tropical climates.

2X 1" Dyn-O-Seal (Female)

CAPPED HEADER FOR SINGLE PANEL SOLUTION

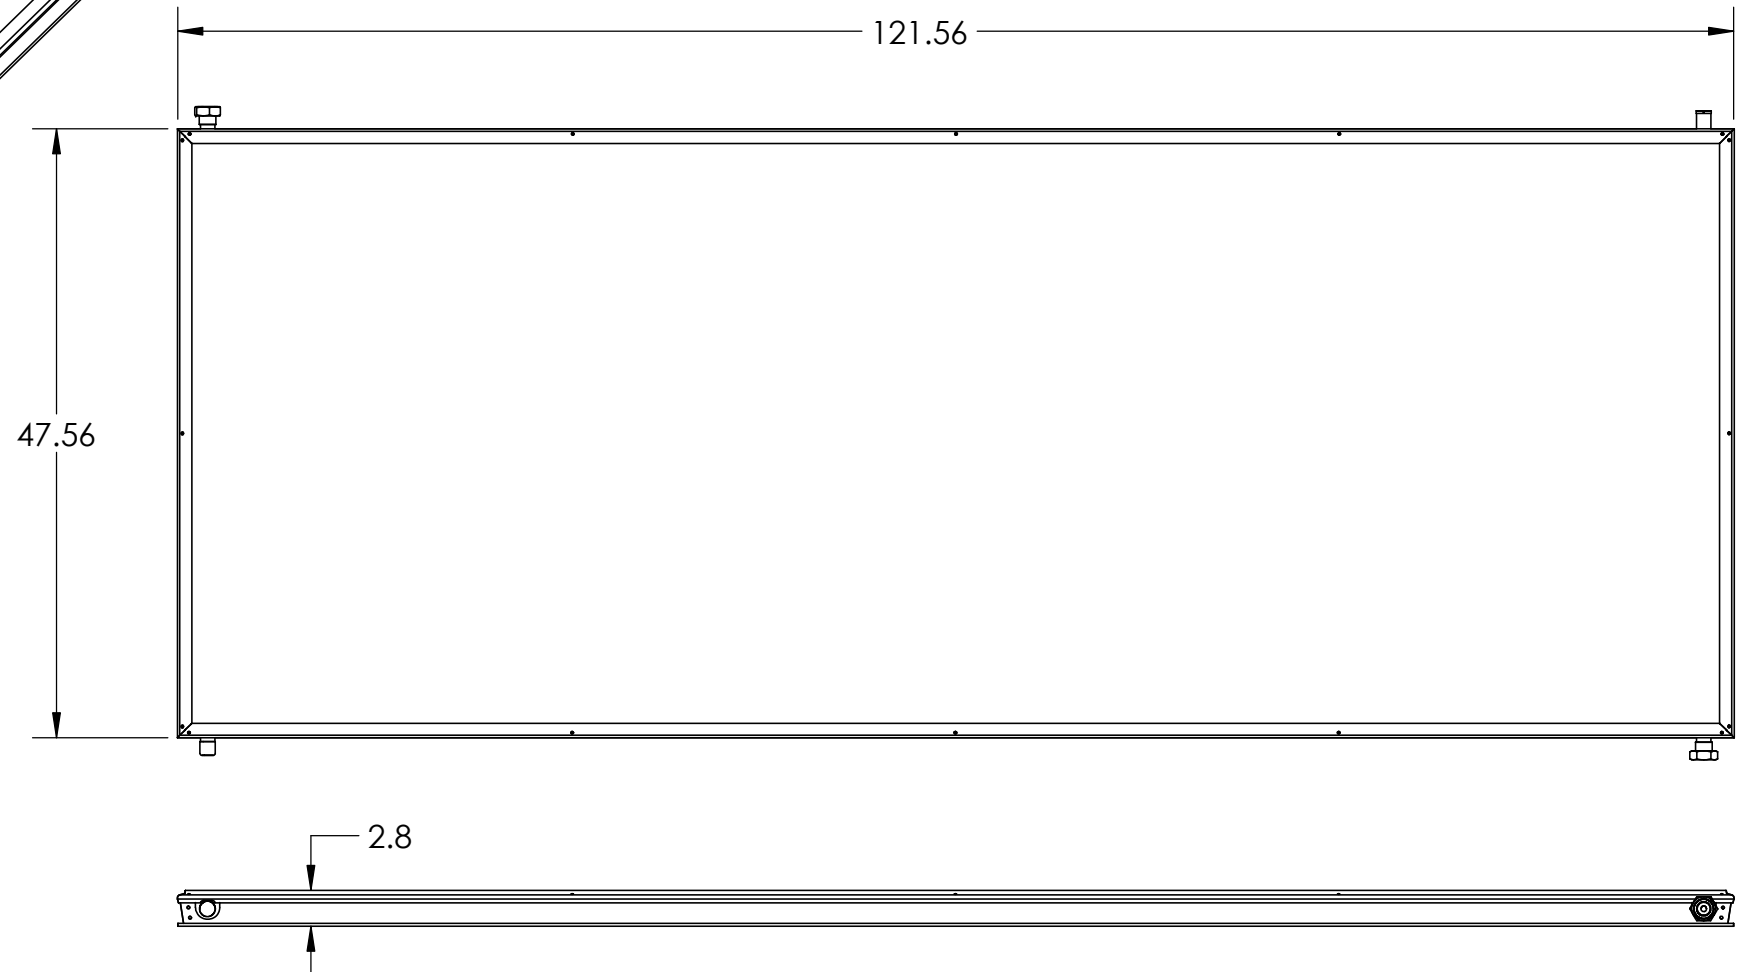

### SPECIFICATIONS

GROSS AREA 40.15 sqft

NET AREA 38.3 sqft

DRY WEIGHT 127 lbs.

FLUID CAPACITY 0.8 gal

MAX OPERATING PRESSURE 150psi (10.34 Bar)

RECOMMENDED DESIGN FLOW RATE (glycol/water) 1.25 gal/min

RECOMMENDED DESIGN FLOW RATE (water) 1.0 gal/min

WIND LOAD CERTIFICATION 50 psf (2.39 kPa)

**PROPRIETARY AND CONFIDENTIAL**  
 THIS DRAWING CONSTITUTES THE CONFIDENTIAL INFORMATION OF HELIODYNE, INC. AND ITS RECEPTOR POSSESSION DOES NOT CONFER ANY RIGHT IN OR LICENSE TO USE IT OR THE INFORMATION DISCLOSED HERE IN NOR ANY RIGHT TO REPRODUCE THIS DRAWING OR ANY PART HERE IN WITHOUT THE WRITTEN CONSENT OF HELIODYNE, INC.

**heliodyne**  
 SOLAR HOT WATER

4910 SEAPORT AVE RICHMOND, CA 94804

SIZE  
**B**

DWG. NO.  
 50030

REV  
**A**

SCALE: NTS

SHEET 1 OF 1