

Description / Application:

Fully modulating gas fired tankless on demand water heater with sealed combustion and power vented flue. Rated for indoor use to supply hot water to; domestic hot water systems (direct or indirect using water storage tank applications) with or without recirculation system piping, hydronic heating systems, radiant floor heating, and combined domestic water and heating water systems.

Fuel: NG or LP

Safety Features

- Built in Freeze Protection
- Manual Reset Hi Limit (set at 185°F)
- Overheat Cut Off Fuse
- Inlet/Outlet Thermistors for Constant Temperature Monitoring
- Flue Backdraft Pressure Switch
- GFI Power Supply Connection
- Flame Sensor

Venting and Combustion


- 4" Category III Stainless Steel
- 3" Combustion Air Intake
- Vertical or Horizontal Installation
- 25' Max Length, 3 elbows max (90° elbows = 5' equivalent length)
- Power Vent
- Electronic Ignition
- 52 db Fan Noise Level at Max Speed

Accessories:


- TK - BK01 Wall-Mounted Brackets
- TK - TV05 Wall Ventilation Terminator (Direct Vent)
- TK - TV03 Vent Damper
- TK - RE02 Temperature Remote Control (optional)

Remote Controller

- 150' Max Distance From Heater
- Non Polarized 18 Gauge Control Wiring

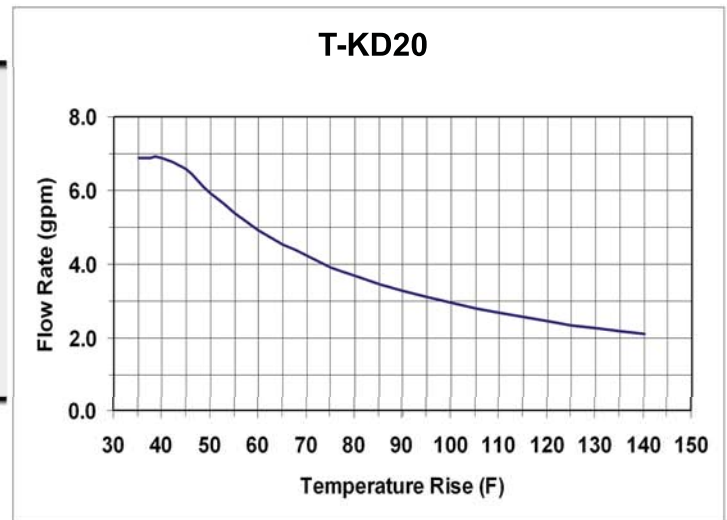

January 2006. Irvine, CA

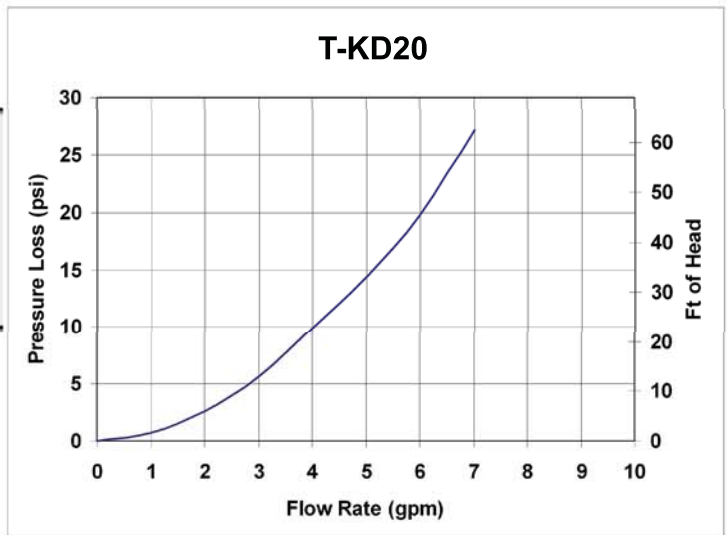

*Based on a stand by mode

January 2006. Irvine, CA

Temp Settings

Dip Switch:	104°F	113°F	122°F (*Default)	176°F				
With RE02 Remote:	99°F	100°F	102°F	104°F	106°F	108°F	110°F	111°F
	113°F	115°F	117°F	122°F	131°F	140°F	158°F	167°F

Takagi Industrial Co. USA, Inc.
 5 Whatney Irvine, CA 92618
 888.882.5244 www.takagi.com

+Complied w/NSF-61 standard (certified by TL Lab)
 ++Met SCAQMD rule 1146.2 (certified by BR Lab)