

SUBMITTAL DATA

JOB/CUSTOMER:

SUBMITTED BY:

ENGINEER:

APPROVED BY:

CONTRACTOR:

ORDER NO:

SPECIFICATION REF:



NOMENCLATURE

W ..... Wireless  
 T ..... Transmitter

DESCRIPTION

With the WT Wireless Transmitter, the user interfaces with the D'MAND Kontrols® System by simply pushing the button, before using hot water. The remote battery operated transmitter sends a signal back to the receiver, which is directly wired to the pump. The pump sends ambient water in the pipes, via the cold water line, back to the water heater (either tank or tankless while rapidly pulling the hot water from the water heater to the furthest fixture.)

TECHNICAL DATA

OPERATING RANGE 80 feet

FREQUENCY 433 MHZ

WIRING 5 volt power supply

APPLICATIONS


The WT is a battery operated (model#A23/12v) wireless transmitter which works with the WRT-KIT wireless receiver transmitter kit

This is compatible with any ACT D'MAND Kontrols® wireless transmitter kit from 1994 to present. (RT-954/ RT-911)

There is no limit on the number of WT transmitters you can use with a wireless receiver.

The WT WILL NOT OPERATE in conjunction with Models: WMSCB-KIT, WMSCB, WMSRB-KIT, WMSRB, HWMSRB

DIMENSIONS

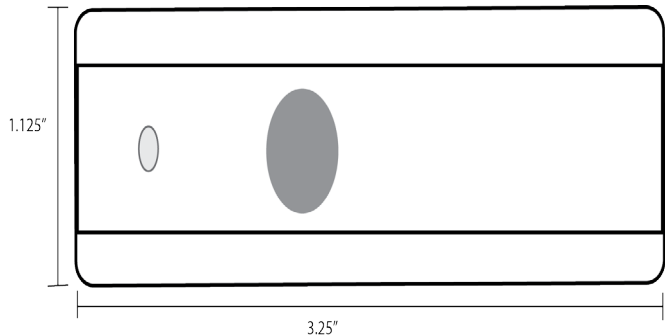

WARRANTY

Accessories: Hard-Wired Buttons, Wireless Transmitters and Receivers, all Hard-Wired or Wireless Motion Sensors and Receivers: Warranty – (One Year from date of purchase) Labor is not included with Limited Warranty. In order to obtain services under this warranty, it is the responsibility of the purchaser to promptly notify the Company in writing and promptly deliver the item in question, delivery prepaid to the factory. The address for notification and delivery is ACT, Inc. D'MAND KONTROL® Systems, 3176 Pullman Street, Suite 119, Costa Mesa CA 92626. If the product or part in question contains no defects as covered in the warranty, the purchaser will be notified and billed for parts and labor charges in effect at the time of factory examination and repair.